


wilson Dairy Hot Water Heaters

"D" Series Dairy Units

The Wilson "D" Series Dairy Water Heater is available with or without attached header tank. If installed with a separate header tank, the maximum head pressure which is measured from the base of the storage unit to the top of the open vent pipe, must not exceed 6 metres. Both models are available in a variety of sizes and all are fitted with main and booster elements. The booster element is used to restore heat lost between the morning and evening milking and can either be turned on and off manually or controlled by a time switch.

Element sizes are based on a 8 hour heating cycle, but can be varied on request to suit supply authorities.

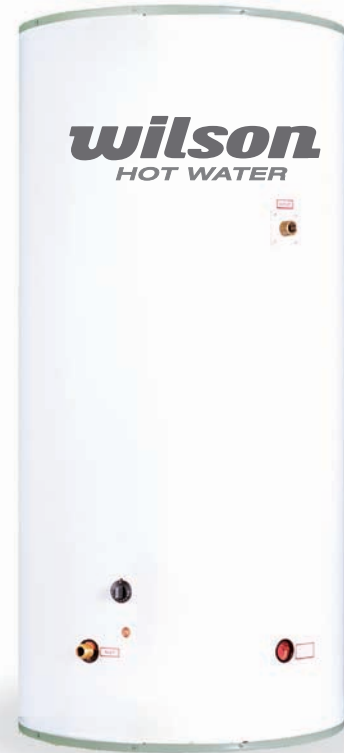

- Polyurethane insulation for minimum heat loss
- Maximum head 6.0m
- For use with separate cold feed tank
- With 1" BSP outlet, De-sludge plug, Corrosion resistant 'incoloy' elements & anode
- 5 year warranty*

* Refer to warranty card for details.

Freecall 1800 302 050 Phone: +61 3 9720 2888 Fax: +61 3 9720 2026
sales@wilsonhotwater.com.au www.wilsonhotwater.com.au

"D" Series Dairy Heater

(Max. Head 6.0m) (For use with separate cold feed tank)

With 1" BSP outlet, De-sludge plug, Corrosion resistant 'incoloy' elements & anode

Code No.	Delivery (litres)	Dimensions (mm) diameter x height	Element sizes (kW) main/booster
D2	160	660 x 920	1 x 3.0 / 1 x 2.4
D3	250	660 x 1255	1 x 3.6 / 1 x 2.4
D5	315	660 x 1575	1 x 4.8 / 1 x 2.4
D6	400	790 x 1365	2 x 3.0 / 1 x 3.0
D7	500	790 x 1640	2 x 3.6 / 1 x 3.6
D8	630	790 x 2000	2 x 4.8 / 1 x 3.6



Nb: Tip-Toe anode protection available upon request

"D" Series Dairy Heater- with attached Cold feed tank

With 1" BSP outlet, De-sludge plug, Corrosion resistant 'incoloy' elements & anode

Code No.	Delivery (litres)	Dimensions (mm) diameter x height	Element sizes (kW) main/booster
D2/T	160	660 x 1320	1 x 3.0 / 1 x 2.4
D3/T	250	660 x 1655	1 x 3.6 / 1 x 2.4
D5/T	315	660 x 1975	1 x 4.8 / 1 x 2.4
D6/T	400	790 x 1765	2 x 3.0 / 1 x 3.0
D7/T	500	790 x 2040	2 x 3.6 / 1 x 3.6
D8/T	630	790 x 2400	2 x 4.8 / 1 x 3.6



All units are fitted with a temperature indicator

Nb: Tip-Toe anode protection available upon request

Wilson Dairy Water Heaters are fitted with a sacrificial anode to assist in combating the effects of aggressive water supplies around the heating zone. It is important that the anode is regularly checked and replaced BEFORE it is eroded. Tip to Toe anodes are available upon request where more protection is required.

