

# **wilson**

## ***Dairy Hot Water Heaters***



All units are fitted with adjustable thermostats and supplied with tip to toe anodes. The range of units available allows for the correct choice to be made to suit all cleaning programs: as a rule of thumb, 25 litres per set of cups per day.

Wilson have available four flexible options depending on your requirements eg. the traditional copper cylinder with colorbond case, ranging to the premium stainless steel cylinder with polished stainless steel outer case.

The Rapid Flow unit is available in 12 sizes from 315 litre right up to a generous 2000 litre unit. Rapid Flow dairy water heaters are designed to deliver a flow rate of approximately 180 litres per minute of hot water at a temperature of between 94-96 degrees celsius.

## ***Rapid Flow Dairy Heaters***

**FREE CALL**


**1800 302 050**

**sales@wilsonhotwater.com.au**

**www.wilsonhotwater.com.au**

130-140 Merrindale Drive Croydon South Vic 3136

**wilson**  
**CUSTOMISED HOT WATER**

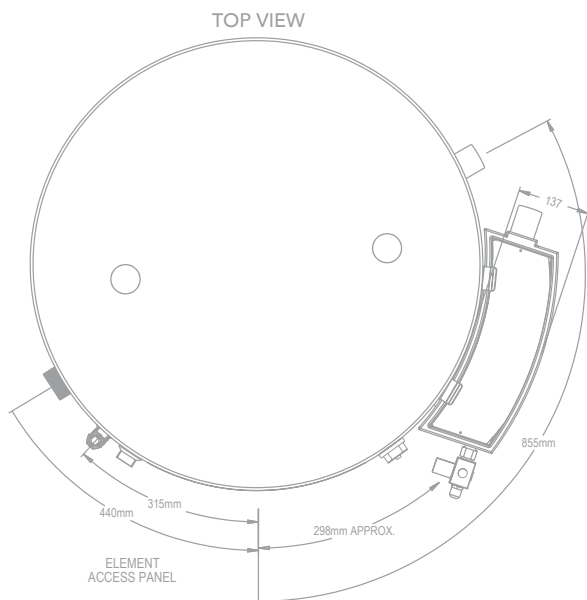

Option Code	Cylinder	Outer Case
COCB	Copper	Colorbond
COSS	Copper	Stainless Steel
SSCB	Stainless Steel	Colorbond
SSSS	Stainless Steel	Stainless Steel

With electricity costs a major concern, the Rapid Flow unit makes use of off peak electricity rates, therefore making the heating of water more cost effective. Booster elements are fitted to restore any heat loss between the morning and afternoon milking. The Wilson unit has an aesthetically designed polyethylene cold feed supply tank which fits neatly onto the side of the RF unit, keeping the overall dimensions of the water heater to a minimum. All dairy hot water heaters are insulated with highly efficient polyurethane insulation to provide maximum heat retention. Wilson Rapid Flow dairy water heaters are fitted with sacrificial anodes as standard, to assist in combating the effects of aggressive water supplies.

## Dairy Hot Water Heater **Specifications**

Code Number	Delivery Litres	Dimensions (mm) Diameter x Height	Element Sizes (kW) Main / Booster
RF 0315	315 Ltrs	860 d x 1095 h	2 x 3.0 main / 1 x 3.0 booster
RF 0400	400 Ltrs	860 d x 1295 h	2 x 3.0 main / 1 x 3.0 booster
RF 0500	500 Ltrs	860 d x 1535 h	2 x 3.6 main / 1 x 3.6 booster
RF 0630	630 Ltrs	860 d x 1845 h	2 x 4.8 main / 1 x 3.6 booster
RF 0800	800 Ltrs	1040 d x 1570 h	3 x 3.6 main / 1 x 3.6 booster
RF 1000	1000 Ltrs	1040 d x 1865 h	3 x 4.8 main / 1 x 3.6 booster
RF 1260	1260 Ltrs	1140 d x 1895 h	3 x 6.0 main / 1 x 3.6 booster
RF 1360	1360 Ltrs	1140 d x 2040 h	3 x 6.0 main / 1 x 3.6 booster
RF 1500	1500 Ltrs	1140 d x 2210 h	3 x 6.0 main / 1 x 3.6 booster
RF 1600	1600 Ltrs	1140 d x 2346 h	4 x 6.0 main / 1 x 3.6 booster
RF 1800	1800 Ltrs	1140 d x 2568 h	4 x 6.0 main / 1 x 3.6 booster
RF 2000	2000 Ltrs	1140 d x 2811 h	4 x 6.0 main / 1 x 3.6 booster

Please note: All or part of rated delivery available at any one time.

## Dairy Hot Water Heaters **features**

- Polyurethane foam Insulation for minimum heat loss
- 50mm sludge fitting
- Copper or stainless cylinders
- Colorbond or stainless steel outer case
- Tip to toe anodes standard
- Solar adaptable
- Solar systems available

Note: Larger sized outlets are available. Cost of larger outlets available on request. If required the solenoid valve can be wired to a power point with a timer fitted, to allow the user to nominate the period when the water will enter the unit.

**wilson**  
Dairy Hot Water Heaters