




HYDRALUX
SMARTER HOT WATER

**Flexible
in design.
Quality
you can
depend on.**

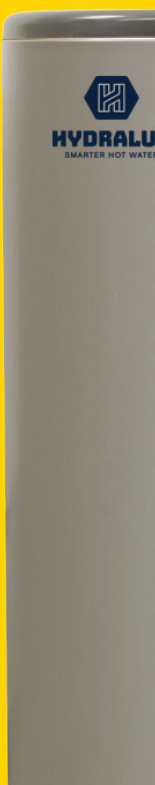

**Hydralux is the smart
thermal storage vessel built
for Australian conditions.
Standout quality at an
understated price.**

Hydralux leads the way in imported high performance thermal storage. Our vessels are manufactured from Duplex 2205 and hold Australian Electrical and Watermark Approvals. Hydralux is designed for ease of installation and endorsed by Wilson Hot Water – a benchmark for Australian customised hot water for over 90 years.



Specifications

| Model # | Capacity Litres | Dimensions Dia x Height | Electric Boost 3kW | Storage | Single Coil Lower m ² 28mm Dia | Twin Coil Lower / Upper m ² 28mm Dia | Connections 6 x 50mm 2 x 25mm 2 x Thermowell Pockets |
|---------------------------|--------------------|----------------------------|-----------------------|---------|---|---|--|
| HSS100 (buffer tank) | 100 | 470 x 1035 | | ✓ | | | 304 Stainless Steel Cylinder 4 x 40mm & 2 x 25mm 1 x Thermowell Pocket |
| HSS200 (buffer tank) | 200 | 470 x 1312 | | ✓ | | | 304 Stainless Steel Cylinder 4 x 32mm & 2 x 25mm 1 x Thermowell Pocket |
| HSSE3151CW (heat pump) | 315 | 600 x 1985 | ✓ | | 4.5 | | ✓ |
| HSSE3152CF | 315 | 600 x 1985 | ✓ | | | 1.4 / 1.0 | ✓ |
| HSS400 | 400 | 700 x 1830 | | ✓ | | | ✓ |
| HSSE4001CF | 400 | 700 x 1830 | ✓ | | 1.8 | | ✓ |
| HSSE4002CF | 400 | 700 x 1830 | ✓ | | | 1.8 / 1.0 | ✓ |
| HSS600 | 600 | 700 x 2250 | | ✓ | | | ✓ |
| HSSE6001CF | 600 | 700 x 2250 | ✓ | | 2.5 | | ✓ |
| HSSE6002CF | 600 | 700 x 2250 | ✓ | | | 2.5 / 1.5 | ✓ |
| HSS1000 | 1000 | 900 x 2320 | | ✓ | | | ✓ |
| HSS1000M* | 1000 | 900 x 2320 | | ✓ | | | ✓ |
| HSSE10002CF | 1000 | 900 x 2320 | ✓ | | | 3.5 / 1.7 | ✓ |

* Additional sensor ports



Storage



Single Coil

includes 3kW
electric element



Twin Coil

includes 3kW
electric element

Features

- Duplex 2205 Stainless Steel
- Polyurethane Foam Insulation
- Painted Metal Outer Case
(1000 Litre - Stainless Steel Outer Case)
- 6 x 50mm, 2 x 25mm Fittings
(1 x 25mm for PTR)
- 28mm Diameter Heat Exchange Coils
- 32mm Fittings on Heat Exchange Coils
- Large Surface areas for Heat
Exchange Coils
- Thermowell Pockets
- 3.0kW Element standard on Coil Tanks
- Watermark Approved
- Australian Electrical Approvals
- Maximum Working Pressure – 700kPa

Another quality
product from:

wilson
CUSTOMISED HOT WATER

For all enquiries
Call us on +61 3 9751 7788
sales@wilsonhotwater.com.au
59 Barry St Bayswater VIC 3153
wilsonhotwater.com.au



HYDRALUX
SMARTER HOT WATER